
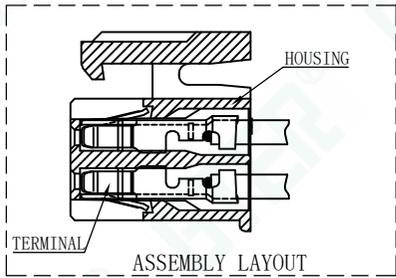
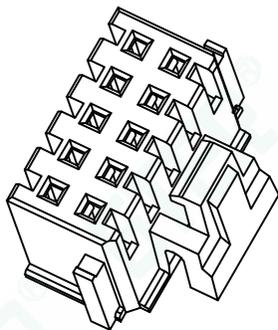


- Main Specifications
- 额定电流 (Current rating): 3.0A AC, DC
  - 额定电压 (Voltage rating): 250V AC, DC
  - 温度范围 (Temperature range): -25°C TO + 85°C
  - 接触电阻 (Contact resistance): ≤30MΩ
  - 绝缘电阻 (Insulation resistance): ≥100MΩ
  - 耐电压 (Withstand voltage): 1000V AC/minute

规格表	Part No	Wire Range	Insulation O.D	Material	Finish	Qty/reel	Features(Used in)	Remark
	C2005TF-PTS	AWG#28~#24	1.6(MAX)	Phosphor Bronze	Tin-plated	15,000	GJ-C2005 SOCKET HOUSIN SERIES	GJ-C2005/A2005 SERIES 共用端子
	A2005TF-PTS	AWG#28~#24	1.6(MAX)	Phosphor Bronze	Tin-plated	15,000	GJ-A2005 SOCKET HOUSIN SERIES	





<b>GTER</b> 东莞市高嘉精密电子有限公司 DONGGUAN GJ PRECISION ELECTRONICS Co.Ltd. PART NO: GJ-C2005TF-PTS 2.00mm WIRE TO WIRE CONNECTOR, SOCKET TERMINAL	APPROVED BY: APPROVED	PROJ:	TOLERANCE	LTR	REVISION RECORD		NAME	DATE
	CHECKED BY: CHECKED	UNIT: mm	-1 ±0.10	标记1	修改内容1	姓名1	日期1	
	DRAWN BY: yiliangdong	SCALE: --	1-5 ±0.15	标记2	修改内容2	姓名2	日期2	
	DATE: 2024-08-06	SHEET: 1/1 A4	5-15 ±0.20	标记3	修改内容3	姓名3	日期3	
	C2005母端子 产品图	VER NO: AO	15-30 ±0.25	标记4	修改内容4	姓名4	日期4	
		30- ±0.30	CUSTOMER: ---		Conforms to The RoHS&REACH Instruction			
		(ANGLE) X ±10°						

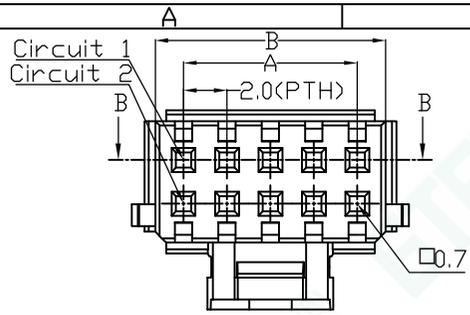


- Main Specifications
- 接触电阻 (Contact resistance):  $\leq 30m\Omega$
  - 绝缘电阻 (Insulation resistance):  $\geq 100M\Omega$
  - 额定电压 (Rated voltage): 250V AC DC
  - 额定电流 (Rated current): 3.0A AC DC
  - 耐电压 (Withstand Voltage): 1000V AC/minute
  - 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$

■ 产品编码简介: GJ-C2005HF-2x\*\*-AON  
① ② ③ ④


1. 系列号;
  2. 公胶壳;
  3. Pin位数;
  4. Nylon66 UL94V-0 (本色)
- 适配 GJ-C2005 PLUG HOUSING SERIES  
■ 适配 GJ-C2005 SOCKET TERMINAL.  
■ 适配 GJ-A2005 SERIES wafer .

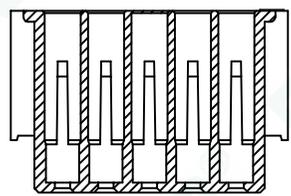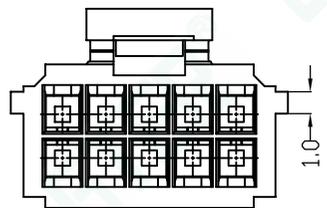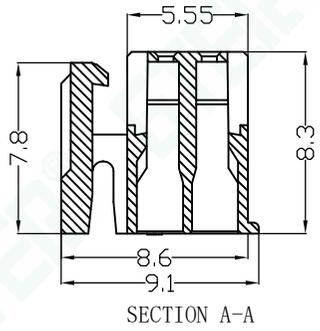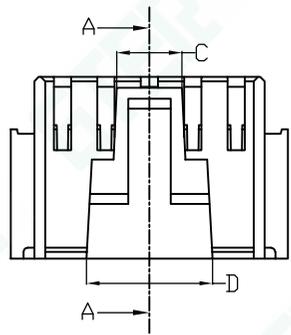


SECTION B-B



04 Circuit



03 Circuit



02 Circuit

Poles	Dimensions(mm)				Q'ty/ bag
	A	B	C	D	
2X02	2.00	4.60	2.90	3.10	1,000
2X03	4.00	6.60	2.90	3.10	1,000
2X04	6.00	8.60	2.30	4.30	1,000
2X05	8.00	10.60	3.00	5.80	1,000
2X06	10.00	12.60	5.40	8.20	1,000
2X07	12.00	14.60	7.05	9.80	1,000
2X08	14.00	16.60	7.05	9.70	1,000
2X09	16.00	18.60	11.10	13.70	1,000
2X10	18.00	20.60	13.10	15.70	1,000
2X11	20.00	22.60	13.10	15.70	1,000
2X12	22.00	24.60	13.10	15.70	1,000
2X13	24.00	26.60	13.10	15.70	1,000
2X14	26.00	28.60	13.10	15.70	1,000
2X15	28.00	30.60	13.10	15.70	1,000
2X16	30.00	32.60	13.10	15.70	1,000
2X17	32.00	34.60	13.10	15.70	1,000
2X18	34.00	36.60	13.10	15.70	1,000
2X19	36.00	38.60	13.10	15.70	1,000
2X20	38.00	40.60	13.10	15.70	1,000

**GTER**® 东莞市高嘉精密电子有限公司  
DONGGUAN GJ PRECISION ELECTRONICS Co.,Ltd.

PART NO: GJ-A2005HF-2x\*\*-AON

2.00mm WIRE TO BOARD CONNECTOR, SOCKET HOUSING

APPROVED BY: APPROVED

CHECKED BY: CHECKED

DRAWN BY: yiliangdong

DATE: 2025-05-20

A2005公胶壳 产品图

PROJ:

UNIT: mm

SCALE: --

SHEET: 1/1 | A4

VER NO: AO

TOLERANCE

-1 ±0.10

1-5 ±0.15

5-15 ±0.20

15-30 ±0.25

30- ±0.30

(ANGLE) X ±10°

LTR

标记1 修改内容1

标记2 修改内容2

标记3 修改内容3

标记4 修改内容4

REVISION RECORD

NAME

姓名1

姓名2

姓名3

姓名4

DATE

日期1







日期2

日期3

日期4

CUSTOMER: ---

Conforms to The RoHS&REACH Instruction

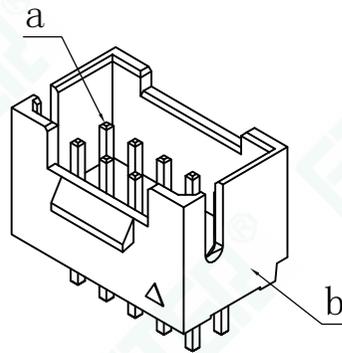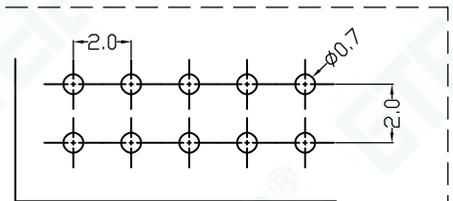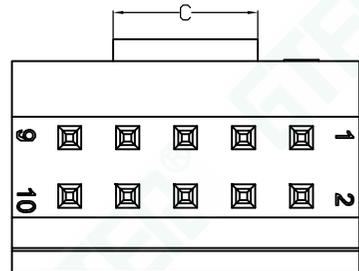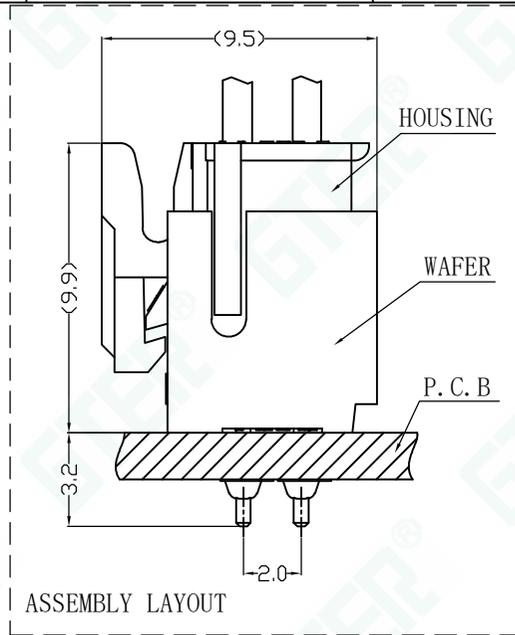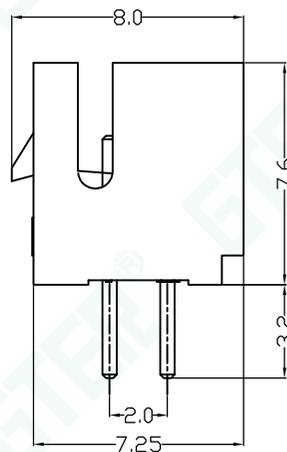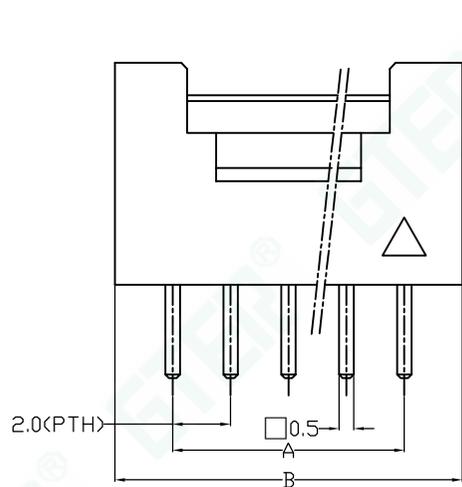

- Main Specifications
- 接触电阻 (Contact resistance):  $\leq 30m\Omega$
  - 绝缘电阻 (Insulation resistance):  $\geq 100m\Omega$
  - 额定电压 (Rated voltage): 250V AC DC
  - 额定电流 (Rated current): 3.0A AC DC
  - 耐电压 (Withstand Voltage): 1000V AC/minute
  - 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$

■ 产品编码简介: GJ-A2005WVD-2x\*\*-AON\*

1. 系列号;
2. 立式插板针座;
3. Pin位数;
4. Nylon66 UL94V-0 (本色)\*灼热丝.

■ 适配 GJ-A2005 SOCKET HOUSING SERIES

■ 适用基板厚度 1.0-1.6mm

Poles	Dimensions(mm)			Q'ty/ bag
	A	B	C	
2X02	2.00	6.00	3.00	1,000
2X03	4.00	8.00	3.00	1,000
2X04	6.00	10.00	3.00	1,000
2X05	8.00	12.00	5.00	1,000
2X06	10.00	14.00	7.00	1,000
2X07	12.00	16.00	9.00	1,000
2X08	14.00	18.00	11.00	1,000
2X09	16.00	20.00	13.00	1,000
2X10	18.00	22.00	15.00	1,000
2X11	20.00	24.00	17.00	1,000
2X12	22.00	26.00	19.00	1,000
2X13	24.00	28.00	21.00	1,000
2X14	26.00	30.00	23.00	1,000
2X15	28.00	32.00	25.00	1,000
2X16	30.00	34.00	27.00	1,000
2X17	32.00	36.00	29.00	1,000
2X18	34.00	38.00	31.00	1,000
-x--	-,-	-,-	-,-	1,000
2X30	58.00	62.00	55.00	1,000

组成序号	名称	材质
a	0.5方pin针	青铜镀锡
b	WAFER 主体	Nylon66(本色) UL94V-0

SMT TOP ENTRY TYPE PCB LAYOUT

**GTER**® 东莞市高嘉精密电子有限公司  
DONGGUAN GJ PRECISION ELECTRONICS Co.,Ltd.

PART NO: GJ-A2005WVD-\*\*-AON\*

2.00mm WIRE TO BOARD CONNECTOR, WAFER (V-DIP TYPE)

APPROVED BY: APPROVED

CHECKED BY: CHECKED

DRAWN BY: yiliangdong

DATE: 2025-05-20

A2005立式插板针座产品图

PROJ:

UNIT: mm

SCALE: --

SHEET: 1/1 A4

VER NO: AO

TOLERANCE

-1 ±0.10

1-5 ±0.15

5-15 ±0.20

15-30 ±0.25

30- ±0.30

(ANGLE) X ±10°

LTR

标记1

标记2

标记3

标记4

CUSTOMER: ---

REVISION RECORD

修改内容1

修改内容2

修改内容3

修改内容4

NAME

姓名1

姓名2

姓名3

姓名4

DATE






日期1

日期2

日期3

日期4

Conforms to The RoHS&REACH Instruction

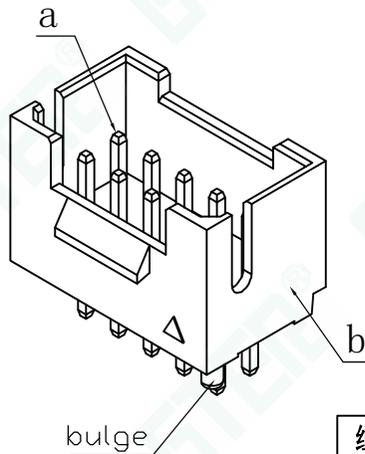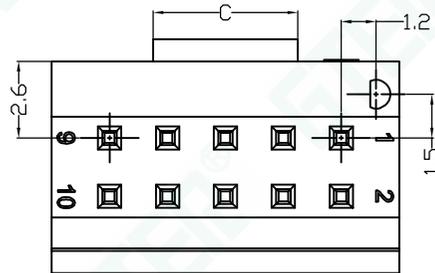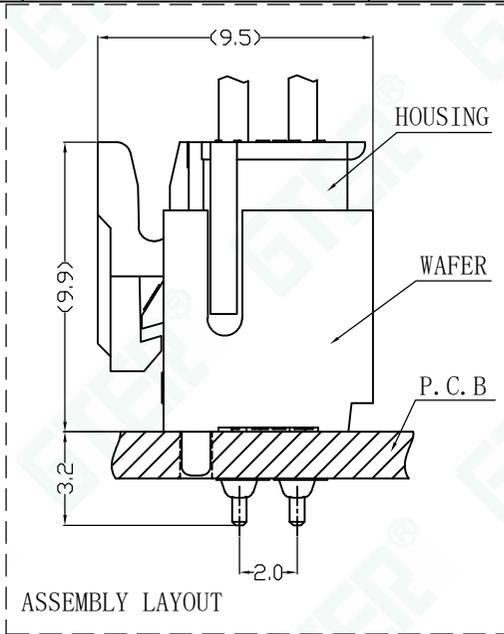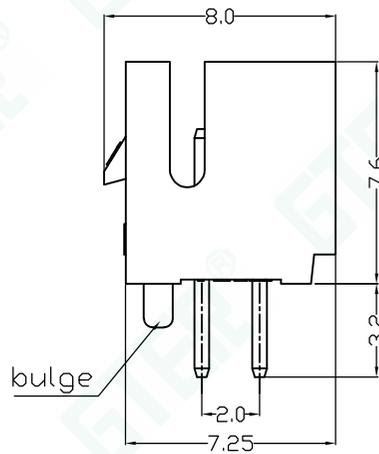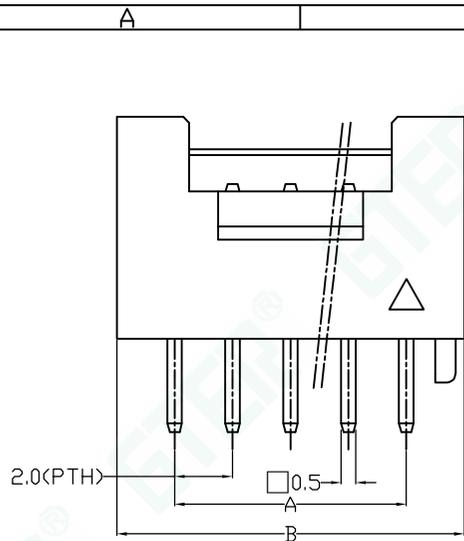

- Main Specifications
- 接触电阻 (Contact resistance):  $\leq 30m\Omega$
  - 绝缘电阻 (Insulation resistance):  $\geq 100m\Omega$
  - 额定电压 (Rated voltage): 250V AC DC
  - 额定电流 (Rated current): 3.0A AC DC
  - 耐电压 (Withstand Voltage): 1000V AC/minute
  - 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$


■ 产品编码简介: GJ-A2005WVD-2x\*\*-AON\*-P  
 ① ② ③ ④ ⑤

1. 系列号;
2. 立式插板针座;
3. Pin位数;
4. Nylon66 UL94V-0 (本色)\*灼热丝;
5. P-带定位柱, 选用时需备注。

- 适配 GJ-A2005 SOCKET HOUSIN SERIES
- 适用基板厚度1.0-1.6mm

Poles	Dimensions(mm)			Q'ty/ bag
	A	B	C	
2X02	2.00	6.00	3.00	1,000
2X03	4.00	8.00	3.00	1,000
2X04	6.00	10.00	3.00	1,000
2X05	8.00	12.00	5.00	1,000
2X06	10.00	14.00	7.00	1,000
2X07	12.00	16.00	9.00	1,000
2X08	14.00	18.00	11.00	1,000
2X09	16.00	20.00	13.00	1,000
2X10	18.00	22.00	15.00	1,000
2X11	20.00	24.00	17.00	1,000
2X12	22.00	26.00	19.00	1,000
2X13	24.00	28.00	21.00	1,000
2X14	26.00	30.00	23.00	1,000
2X15	28.00	32.00	25.00	1,000
2X16	30.00	34.00	27.00	1,000
2X17	32.00	36.00	29.00	1,000
2X18	34.00	38.00	31.00	1,000
-x--	-,-	-,-	-,-	1,000
2X30	58.00	62.00	55.00	1,000

组成序号	名称	材质
a	0.5方pin针	青铜镀锡
b	WAFER 主体	Nylon66(本色) UL94V-0

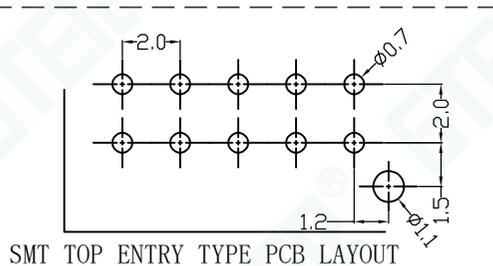

**GTER** 东莞市高嘉精密电子有限公司  
 DONGGUAN GJ PRECISION ELECTRONICS Co.,Ltd.

PART NO: GJ-A2005WVD-\*\*-AON\*-P

2.00mm WIRE TO BOARD CONNECTOR, WAFER (V-DIP TYPE)


APPROVED BY: APPROVED  
 CHECKED BY: CHECKED  
 DRAWN BY: yiliangdong  
 DATE: 2025-05-20

PROJ:   
 UNIT: mm  
 SCALE: --  
 SHEET: 1/1 | A4  
 VER NO: AO

TOLERANCE  
 -1 ±0.10  
 1-5 ±0.15  
 5-15 ±0.20  
 15-30 ±0.25  
 30- ±0.30  
 (ANGLE) X ±10°

LTR  
 REVSION RECORD  
 标记1 修改内容1  
 标记2 修改内容2  
 标记3 修改内容3  
 标记4 修改内容4  
 CUSTOMER: ---

NAME DATE  
 姓名1 日期1  
 姓名2 日期2  
 姓名3 日期3  
 姓名4 日期4  
 Conforms to The RoHS&REACH Instruction



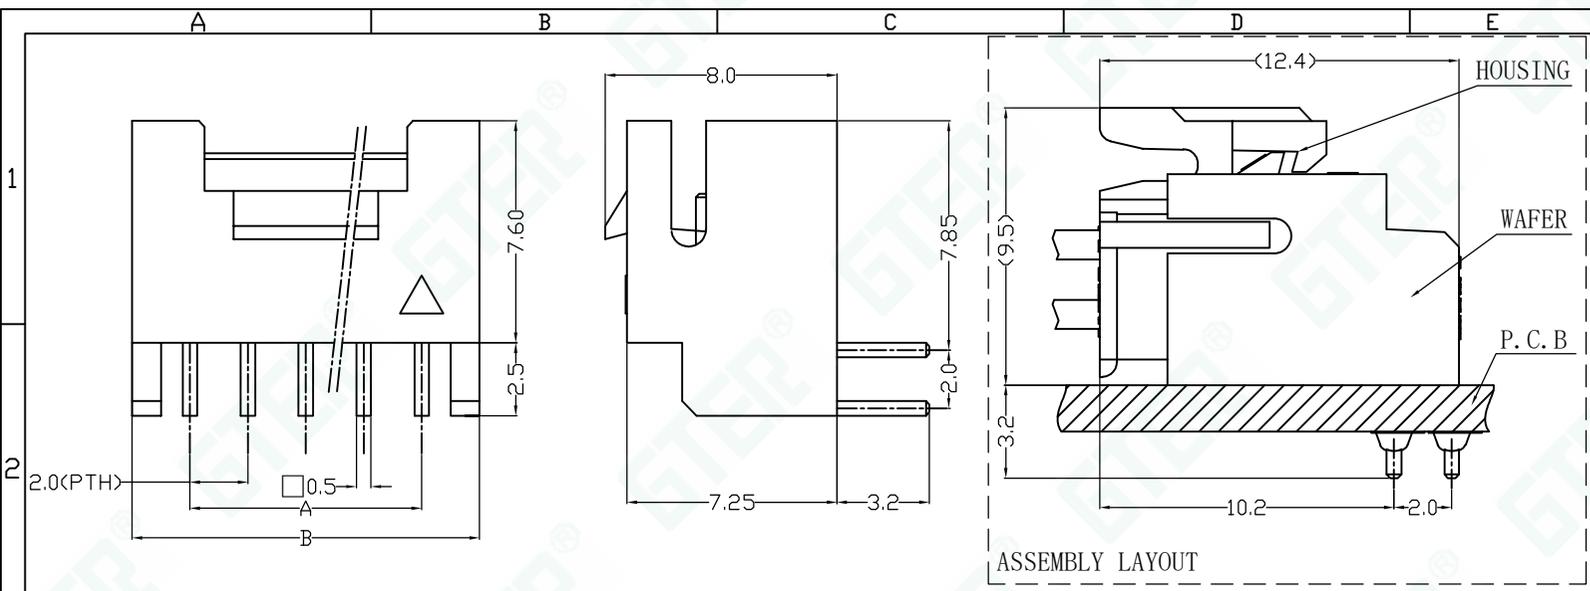


**■ Main Specifications**  
 . 接触电阻 (Contact resistance):  $\leq 30m\Omega$   
 . 绝缘电阻 (Insulation resistance):  $\geq 100m\Omega$   
 . 额定电压 (Rated voltage): 250V AC DC  
 . 额定电流 (Rated current): 3.0A AC DC  
 . 耐电压 (Withstand Voltage): 1000V AC/minute  
 . 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$

**■ 产品编码简介: GJ-A2005WRD-2x\*\*-AON-LE**  
 ① ② ③ ④ ⑤

1. 系列号;
2. 卧式插板针座;
3. Pin位数;
4. Nylon66 UL94V-0 (本色)\*灼热丝;
5. LE-带定位边, 选用时料号需备注。

**■ 适配 GJ-A2005 SOCKET HOUSING SERIES**  
**■ 适用基板厚度 1.0-1.6mm**

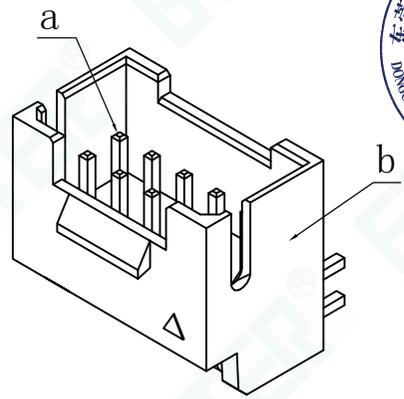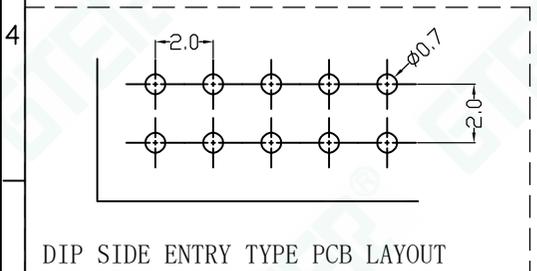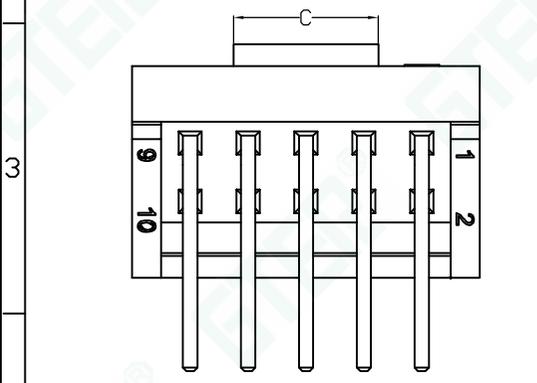




Poles	Dimensions(mm)			Q'ty/ bag
	A	B	C	
2X02	2.00	6.00	3.00	1,000
2X03	4.00	8.00	3.00	1,000
2X04	6.00	10.00	3.00	1,000
2X05	8.00	12.00	5.00	1,000
2X06	10.00	14.00	7.00	1,000
2X07	12.00	16.00	9.00	1,000
2X08	14.00	18.00	11.00	1,000
2X09	16.00	20.00	13.00	1,000
2X10	18.00	22.00	15.00	1,000
2X11	20.00	24.00	17.00	1,000
2X12	22.00	26.00	19.00	1,000
2X13	24.00	28.00	21.00	1,000
2X14	26.00	30.00	23.00	1,000
2X15	28.00	32.00	25.00	1,000
2X16	30.00	34.00	27.00	1,000
2X17	32.00	36.00	29.00	1,000
2X18	34.00	38.00	31.00	1,000
-x--	-,-	-,-	-,-	1,000
2X30	58.00	62.00	55.00	1,000

组成序号	名称	材质
a	0.5方pin针	青铜镀锡
b	WAFER 主体	Nylon66(本色) UL94V-0

**GTER® 东莞市高嘉精密电子有限公司**  
 DONGGUAN GJ PRECISION ELECTRONICS Co.,Ltd.  
 PART NO: GJ-A2005WRD-\*\*-AON-LE  
 2.00mm WIRE TO BOARD CONNECTOR, WAFER (R-DIP TYPE)

APPROVED BY: APPROVED	PROJ:	TOLERANCE	LTR	REVISION RECORD	NAME	DATE
CHECKED BY: CHECKED	UNIT: mm	-1 ±0.10	标记1	修改内容1	姓名1	日期1
DRAWN BY: yiliangdong	SCALE: --	1-5 ±0.15	标记2	修改内容2	姓名2	日期2
DATE: 2025-05-20	SHEET: 1/1   A4	5-15 ±0.20	标记3	修改内容3	姓名3	日期3
A2005卧式插板针座产品图	VER NO: AO	15-30 ±0.25	标记4	修改内容4	姓名4	日期4
		30- ±0.30	CUSTOMER: ---			
		(ANGLE) X ±10°	Conforms to The RoHS&REACH Instruction			

A B C D E F

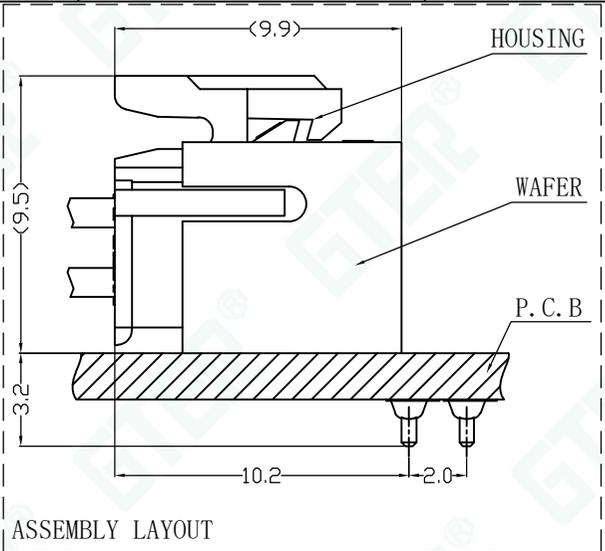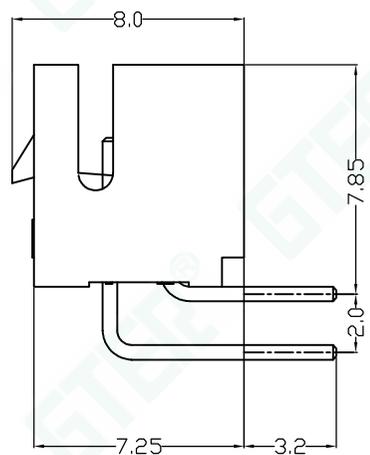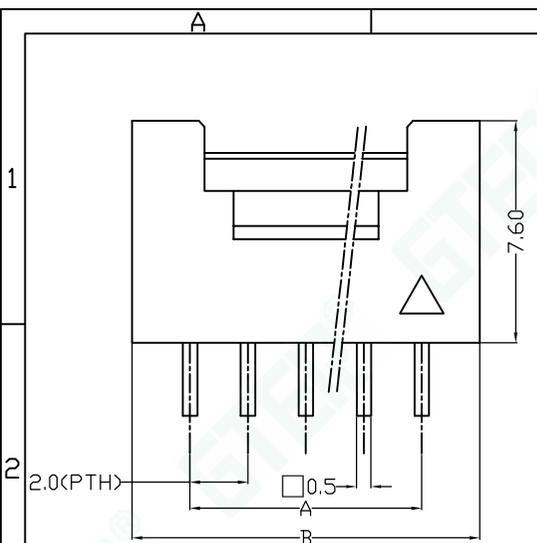



**■ Main Specifications**  
 . 接触电阻 (Contact resistance):  $\leq 30m\Omega$   
 . 绝缘电阻 (Insulation resistance):  $\geq 100m\Omega$   
 . 额定电压 (Rated voltage): 250V AC DC  
 . 额定电流 (Rated current): 3.0A AC DC  
 . 耐电压 (Withstand Voltage): 1000V AC/minute  
 . 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$

**■ 产品编码简介: GJ-A2005WRD-2x\*\*-AON\***  
 ① ② ③ ④


1. 系列号;
2. 卧式插板针座;
3. Pin位数;
4. Nylon66 UL94V-0 (本色)\*灼热丝.

**■ 适配 GJ-A2005 SOCKET HOUSIN SERIES**

**■ 适用基板厚度 1.0-1.6mm**

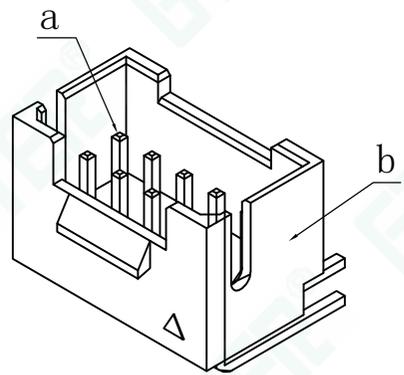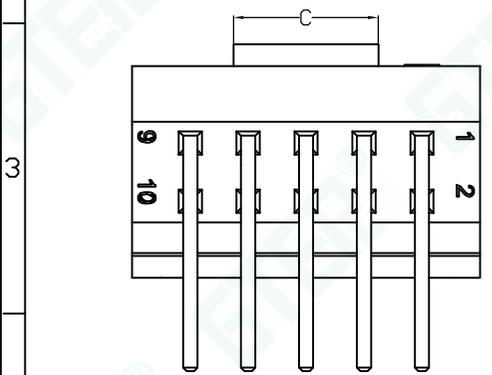

Poles	Dimensions(mm)			Q'ty/ bag
	A	B	C	
2X02	2.00	6.00	3.00	1,000
2X03	4.00	8.00	3.00	1,000
2X04	6.00	10.00	3.00	1,000
2X05	8.00	12.00	5.00	1,000
2X06	10.00	14.00	7.00	1,000
2X07	12.00	16.00	9.00	1,000
2X08	14.00	18.00	11.00	1,000
2X09	16.00	20.00	13.00	1,000
2X10	18.00	22.00	15.00	1,000
2X11	20.00	24.00	17.00	1,000
2X12	22.00	26.00	19.00	1,000
2X13	24.00	28.00	21.00	1,000
2X14	26.00	30.00	23.00	1,000
2X15	28.00	32.00	25.00	1,000
2X16	30.00	34.00	27.00	1,000
2X17	32.00	36.00	29.00	1,000
2X18	34.00	38.00	31.00	1,000
-x--	-,-	-,-	-,-	1,000
2X30	58.00	62.00	55.00	1,000

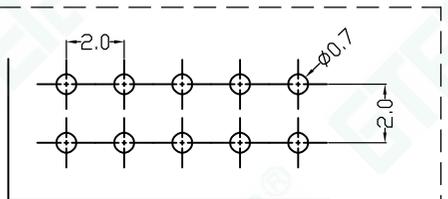

DIP SIDE ENTRY TYPE PCB LAYOUT

组成序号	名称	材质
a	0.5方pin针	青铜镀锡
b	WAFER 主体	Nylon66(本色) UL94V-0

**GTER® 东莞市高嘉精密电子有限公司**  
 DONGGUAN GJ PRECISION ELECTRONICS Co.,Ltd.

PART NO: GJ-A2005WRD-\*\*-AON\*

2.00mm WIRE TO BOARD CONNECTOR, WAFER (R-DIP TYPE)

APPROVED BY: APPROVED  
 CHECKED BY: CHECKED  
 DRAWN BY: yiliangdong  
 DATE: 2025-05-20



PROJ:   
 UNIT: mm  
 SCALE: --  
 SHEET: 1/1 | A4  
 VER NO: AO

TOLERANCE  
 -1 ±0.10  
 1-5 ±0.15  
 5-15 ±0.20  
 15-30 ±0.25  
 30- ±0.30  
 (ANGLE) X ±10°



LTR  
 REVSION RECORD  
 标记1 修改内容1  
 标记2 修改内容2  
 标记3 修改内容3  
 标记4 修改内容4  
 CUSTOMER: ---

NAME DATE  
 姓名1 日期1  
 姓名2 日期2  
 姓名3 日期3  
 姓名4 日期4

Conforms to The RoHS&REACH Instruction

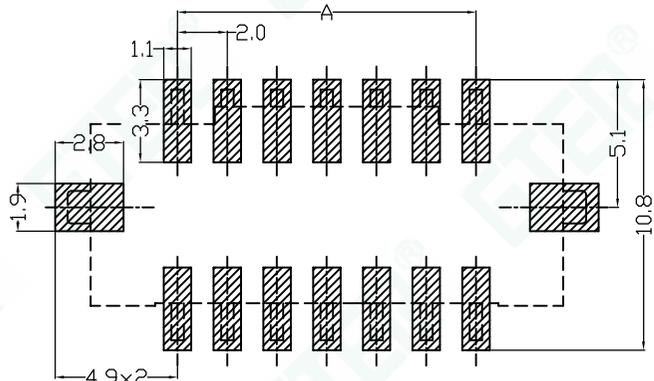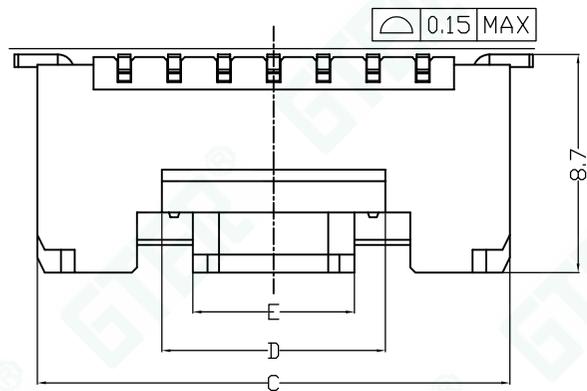

SMT TOP ENTRY TYPE PCB LAYOUT

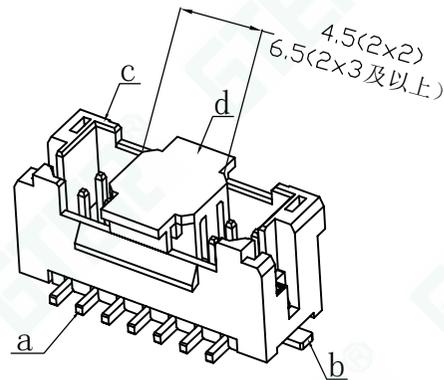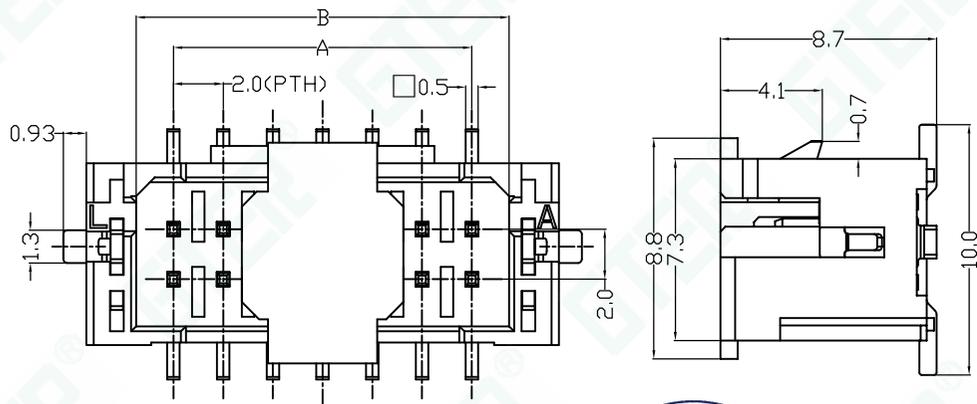

■ Main Specifications

- 接触电阻 (Contact resistance):  $\leq 30m\Omega$
- 绝缘电阻 (Insulation resistance):  $\geq 100M\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 3.0A AC DC
- 耐电压 (Withstand Voltage): 1000V AC/minute
- 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$

■ 产品编码简介: GJ-A2005WVS-2x\*\*-FON

1. 系列号;
2. 立式贴板针座;
3. Pin位数;
4. LCP UL94V-0 (本色).

■ 适配 GJ-A2005 SOCKET HOUSIN SERIES

■ 适用基板厚度 1.0-1.6mm

Poles	Dimensions(mm)				Q'ty/ bag
	A	B	C	D	
2X02	2.00	5.00	9.00	3.00	500
2X03	4.00	7.00	11.00	3.00	500
2X04	6.00	9.00	13.00	3.00	500
2X05	8.00	11.00	15.00	5.00	500
2X06	10.00	13.00	17.00	7.00	500
2X07	12.00	15.00	19.00	9.00	500
2X08	14.00	17.00	21.00	11.00	500
2X09	16.00	19.00	23.00	13.00	500
2X10	18.00	21.00	25.00	15.00	500
2X11	20.00	23.00	27.00	17.00	500
2X12	22.00	25.00	29.00	19.00	500
2X13	24.00	27.00	31.00	21.00	500
2X14	26.00	29.00	33.00	23.00	500
2X15	28.00	31.00	35.00	25.00	500
2X16	30.00	33.00	37.00	27.00	500

组成序号	名称	材质
a	0.5方pin针	青铜镀锡
b	接地片	青铜镀锡
c	WAFER 主体	LCP(本色) UL94V-0
d	吸盖	LCP(本色) UL94V-0



**GTER**® 东莞市高嘉精密电子有限公司  
DONGGUAN GJ PRECISION ELECTRONICS Co.,Ltd.

PART NO: GJ-A2005WVS-\*\*-AON\*

2.00mm WIRE TO BOARD CONNECTOR, WAFER (V-SMT TYPE)

APPROVED BY: APPROVED

CHECKED BY: CHECKED

DRAWN BY: yiliangdong

DATE: 2025-05-23

A2005立式贴板针座产品图

PROJ:

UNIT: mm

SCALE: --

SHEET: 1/1 A4

VER NO: AO

TOLERANCE

-1 ±0.10

1-5 ±0.15

5-15 ±0.20

15-30 ±0.25

30- ±0.30

(ANGLE) X ±10°

LTR

标记1

标记2

标记3

标记4

CUSTOMER: ---

REVISION RECORD

修改内容1

修改内容2

修改内容3

修改内容4

NAME

姓名1

姓名2

姓名3

姓名4

DATE



日期1

日期2





日期3

日期4

Conforms to The RoHS&REACH Instruction

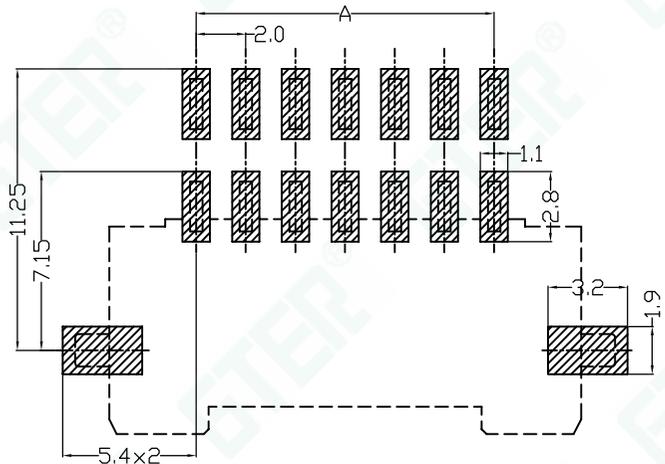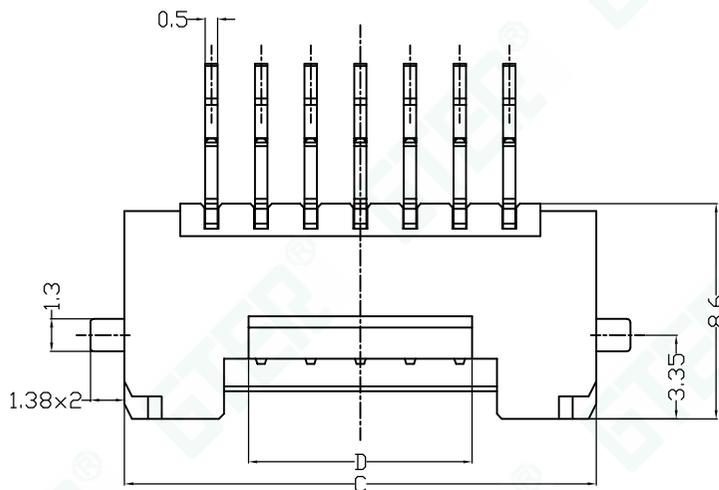

SMT SIDE ENTRY TYPE PCB LAYOUT

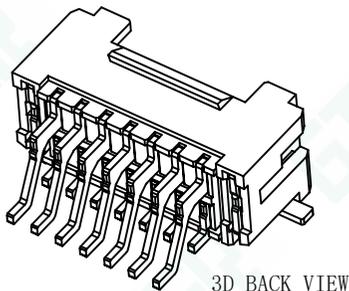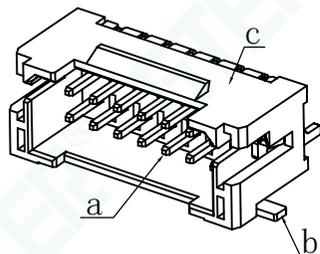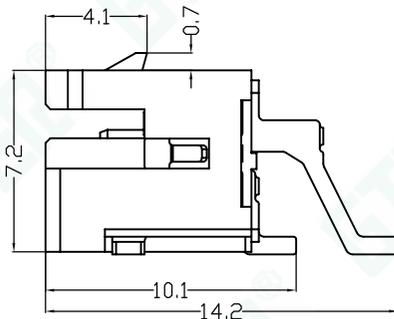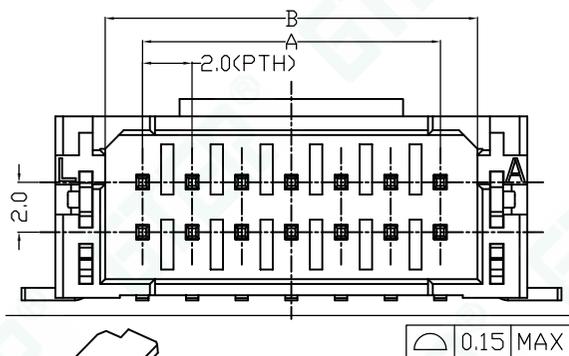

3D BACK VIEW

■ Main Specifications

- 接触电阻 (Contact resistance):  $\leq 30m\Omega$
- 绝缘电阻 (Insulation resistance):  $\geq 100M\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 3.0A AC DC
- 耐电压 (Withstand Voltage): 1000V AC/minute
- 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$

■ 产品编码简介: GJ-A2005WRS-2x\*\*-FON

1. 系列号;
2. 卧式贴板针座;
3. Pin位数;
4. LCP UL94V-0 (本色).

■ 适配 GJ-A2005 SOCKET HOUSIN SERIES

■ 适用基板厚度 1.0-1.6mm

Poles	Dimensions(mm)				Q'ty/ bag
	A	B	C	D	
2X02	2.00	5.00	9.00	3.00	300
2X03	4.00	7.00	11.00	3.00	300
2X04	6.00	9.00	13.00	3.00	300
2X05	8.00	11.00	15.00	5.00	300
2X06	10.00	13.00	17.00	7.00	300
2X07	12.00	15.00	19.00	9.00	300
2X08	14.00	17.00	21.00	11.00	300
2X09	16.00	19.00	23.00	13.00	300
2X10	18.00	21.00	25.00	15.00	300
2X11	20.00	23.00	27.00	17.00	300
2X12	22.00	25.00	29.00	19.00	300
2X13	24.00	27.00	31.00	21.00	300
2X14	26.00	29.00	33.00	23.00	300
2X15	28.00	31.00	35.00	25.00	300
2X16	30.00	33.00	37.00	27.00	300

组成序号	名称	材质
a	0.5方pin针	青铜镀锡
b	接地片	青铜镀锡
c	WAFER 主体	LCP(本色) UL94V-0



**GTER** 东莞市高嘉精密电子有限公司  
DONGGUAN GJ PRECISION ELECTRONICS Co.,Ltd.

PART NO: GJ-A2005WRS-\*\*-AON

2.00mm WIRE TO BOARD CONNECTOR, WAFER (R-SMT TYPE)

APPROVED: [Signature]  
CHECKED BY: CHECKED  
DRAWN BY: yiliangdong  
DATE: 2025-05-23  
A2005卧式贴板针座产品图

PROJ: [Symbol]  
UNIT: mm  
SCALE: --  
SHEET: 1/1 | A4  
VER NO: AO

TOLERANCE  
-1 ±0.10  
1-5 ±0.15  
5-15 ±0.20  
15-30 ±0.25  
30- ±0.30  
(ANGLE) X ±10°

LTR	REVISION RECORD	NAME	DATE
标记1	修改内容1	姓名1	日期1
标记2	修改内容2	姓名2	日期2
标记3	修改内容3	姓名3	日期3
标记4	修改内容4	姓名4	日期4

CUSTOMER: ---  
Conforms to The RoHS&REACH Instruction