




包装示意图(端子V型口向外顺时针绕盘)



SECTION A-A

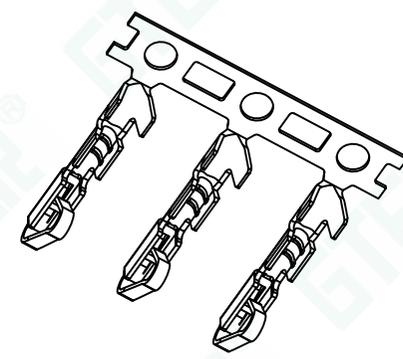

SECTION B-B



SECTION C-C

■ Main Specifications

- 额定电流 (Current rating): 2.0A AC, DC
- 额定电压 (Voltage rating): 250V AC, DC
- 温度范围 (Temperature range): -25°C TO +85°C
- 接触电阻 (Contact resistance): ≤20MΩ
- 绝缘电阻 (Insulation resistance): ≥1000MΩ
- 耐电压 (Withstand voltage): 1000V AC/minute

规格表	Part No	Wire Range	Insulation O.D	Material	Finish	Qty/reel	Features(Used in)	Remark
	A2500TM-PA1-G/F	AWG (2468) #26~#22	1.7 (MAX)	Phosphor Bronze	Tin-plated	10,000	Light belt CONNECTOR	

<b>GTER</b> ® 东莞市高嘉精密电子有限公司 DONGGUAN GJ PRECISION ELECTRONICS Co.,Ltd.	APPROVED BY: APPROVED	PROJ:	TOLERANCE	LTR	REVISION RECORD		NAME	DATE
	CHECKED BY: CHECKED	UNIT: mm	-1 ±0.10	标记1	修改内容1	姓名1	日期1	
	DRAWN BY: yiliangdong	SCALE: --	1-5 ±0.15	标记2	修改内容2	姓名2	日期2	
	DATE: 2025-05-21	SHEET: 1/1 A4	5-15 ±0.20	标记3	修改内容3	姓名3	日期3	
PART NO: GJ-A2500TM-P**	DATE: 2025-05-21	SHEET: 1/1 A4	15-30 ±0.25	标记4	修改内容4	姓名4	日期4	
2.50mm Light belt CONNECTOR, PLUG TERMINAL	A2500灯带端子产品图	VER NO: A0	30- ±0.30	CUSTOMER: ---		Conforms to The RoHS&REACH Instruction		
			(ANGLE) X ±10°					

